



Seqrite Endpoint Security 7.6

Administrator's Guide

วิธีการติดตั้ง Seqrite EPS Management

SEPS SME
SEPS Business
SEPS Total
SEPS Enterprise Suit

วิธีการติดตั้ง Seqrite EPS Console

1. เช็คเครื่อง และเตรียมความพร้อมก่อนการติดตั้ง

1.1 ความต้องการของระบบ (ขั้นต่ำ)

- ระบบปฏิบัติการ Windows Base Only
- Processor 1 GHz 32-bit (x86) or 64-bit (x64) Intel Pentium
- Ram 2 GB
- HDD 4800 MB or 4.8 GB
- Web Server IIS (Include ในแพคเกจติดตั้ง)
- .Net Framework 4.0


1.2 ตรวจสอบ และถอนการติดตั้ง Antivirus ค่ายอื่นๆ (ถ้ามี)

1.3 สำหรับ Windows Server ให้ทำการ Remove Feature Windows Defender (รีสตาร์ทเครื่อง 1 รอบ), สำหรับ Windows ทั่วไป ให้ปิดใช้งาน Windows Defender

1.4 ทำการปิด Windows Firewall

1.5 เตรียมแพคเกจติดตั้ง


- SEQRITE76.exe
- mysql-5.6.42-win32.zip

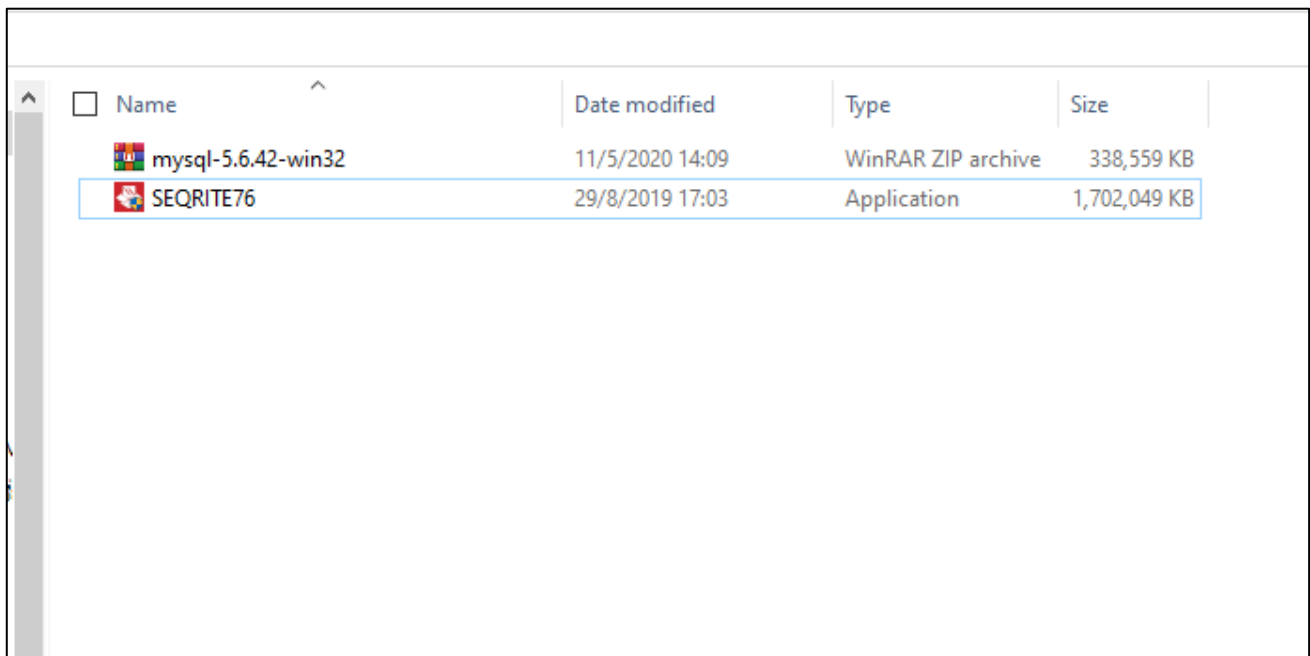

Name	Date modified	Type	Size
mysql-5.6.42-win32	11/5/2020 14:09	WinRAR ZIP archive	338,559 KB
SEQRITE76	29/8/2019 17:03	Application	1,702,049 KB

2. เริ่มการติดตั้ง

- คลิกขวา Run as Administrator ไฟล์ SEQRITE76.exe

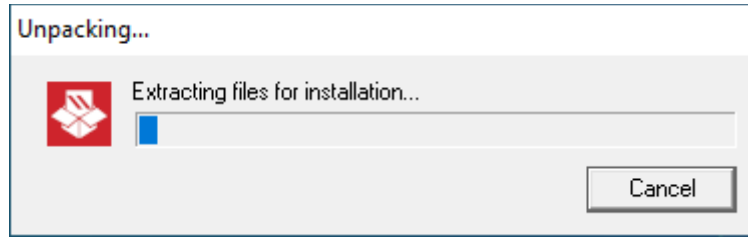

- กด Next



- ยอมรับข้อตกลง ตี๊กช่องสี่เหลี่ยม ทั้งสองช่อง



- หากเครื่องไม่มี IIS และ .Net Framework 4.0 ระบบจะให้ทำการติดตั้ง ให้คลิก Install

- กรณีที่ใช้ Proxy ให้กำหนดค่าแล้วกด Next, หากไม่ใช้ก็กด Next ได้เลย

The screenshot shows the 'Proxy Settings' dialog box in the Seqrite Endpoint Security installer. The title bar reads 'Seqrite Endpoint Security'. The main heading is 'Proxy Settings' with the instruction 'Provide proxy settings if any.' and the Seqrite logo. Below this, a note states: 'If you are using a proxy to connect to the Internet then provide the proxy information. Seqrite Endpoint Security requires these information to register and download the updates.' The 'Proxy Settings' section contains a checkbox for 'Enable Proxy Settings' which is currently unchecked. Below the checkbox are three input fields: 'Proxy Type' (a dropdown menu showing 'HTTP proxy'), 'Proxy Server' (an empty text box), and 'Port' (a text box containing '80'). Underneath these is the section 'Authenticate to connect through Proxy' with 'User Name' and 'Password' input fields. At the bottom of the dialog are three buttons: '<< Back', 'Next >>', and 'Cancel'.

- Browse เลือกไฟล์ mysql-5.6.42-win32.zip

The screenshot shows the 'Pre-requisite - MYSQL 5.6.42' dialog box in the Seqrite Endpoint Security installer. The title bar reads 'Seqrite Endpoint Security'. The main heading is 'Pre-requisite - MYSQL 5.6.42'. The text inside says: 'Please provide a path for MySQL 5.6.42 setup file. If you do NOT have MySQL 5.6.42 setup file, download from the following link and provide the path.' Below this is a blue hyperlink: 'https://cdn.mysql.com/archives/mysql-5.6/mysql-5.6.42-win32.zip'. Underneath the link is a section titled 'MYSQL Setup Path' with a large empty text input field and a 'Browse' button to its right. At the bottom of the dialog are three buttons: '<< Back', 'Next >>', and 'Cancel'.

- กด Next

Seqrite Endpoint Security

Pre-requisite - MYSQL 5.6.42

Please provide a path for MySQL 5.6.42 setup file.
If you do NOT have MySQL 5.6.42 setup file, download from the following link and provide the path.

<https://cdn.mysql.com/archives/mysql-5.6/mysql-5.6.42-win32.zip>

MYSQL Setup Path

C:\Users\Michael\Desktop\Seqrite\mysql-5.6.42-win32.zip

<< Back Next >> Cancel

- เลือก Master Server แล้ว Click Next.

* ในกรณีที่มี Seqrite Management Server ที่เป็น Master อยู่แล้ว ให้ทำการเลือก Secondary แล้วระบุ IP, Port ของ Master Server ทำการ Verify แล้ว Click Next.

Seqrite Endpoint Security

EPS Server

Please select the server type

SEQRITE

EPS Server Type

Select EPS Server Type:

Master Server
Select this option to make EPS as Master Server. Master Server can manage local clients and Secondary Servers installed at different locations.

Secondary Server
Select this option to make EPS as Secondary Server. Secondary Server can be installed at different locations and it reports important statistics to the Parent Server.

Parent server IP/Name

Parent server port

Is SSL Port

<< Back Next >> Cancel

- ที่อยู่ติดตั้งโปรแกรม กด Next



- เตรียมติดตั้ง รอ กด Next



- Server information ให้เลือก IP Address (กรณีเครื่องทดสอบ และไม่ได้ Fix IP ให้เลือก Name)

กด Next

Seqrite Endpoint Security

Server Information

Provide the server details.

Provide the domain name or IP Address of the target Server where Seqrite Endpoint Security will be installed. Specify the HTTP port and SSL port.

Server Information

Domain Name Michael-PC

IP Address

Public Installation (Select if you are installing Seqrite Endpoint Security on a system hosted on the AWS/Azure or similar platforms).

HTTP

HTTP Port: 8101

SSL

Enable Secure Socket Layer

SSL Port: 9111

<< Back Next >> Cancel

- ยืนยันการตั้งค่า กด Yes

Seqrite Endpoint Security

Server Information

Provide the server details.

Provide the domain name or IP Address of the target Server where Seqrite Endpoint Security will be installed. Specify the HTTP port and SSL port.

Server Information

Domain Name Michael-PC

IP Address

Public Installation (Select if you are installing Seqrite Endpoint Security on a system hosted on the AWS/Azure or similar platforms).

HTTP

HTTP Port: 8101

SSL

Enable Secure Socket Layer

SSL Port: 9111

<< Back Next >> Cancel


Seqrite Endpoint Security

You have specified [Michael-PC:9111] as Seqrite Endpoint Security server and port number. Please make sure that the provided information is correct.


Do you want to proceed?

Yes No

- กด Next

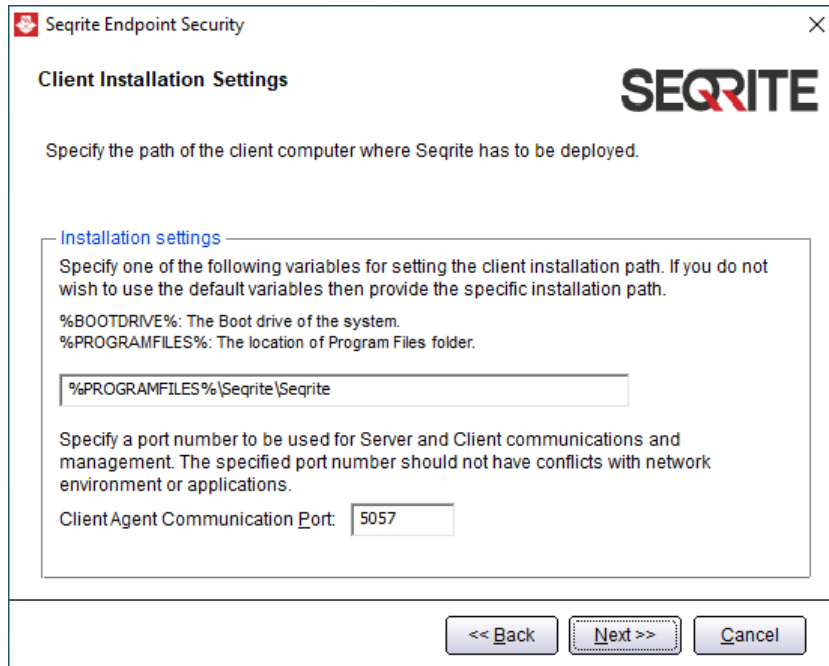

- กด Yes

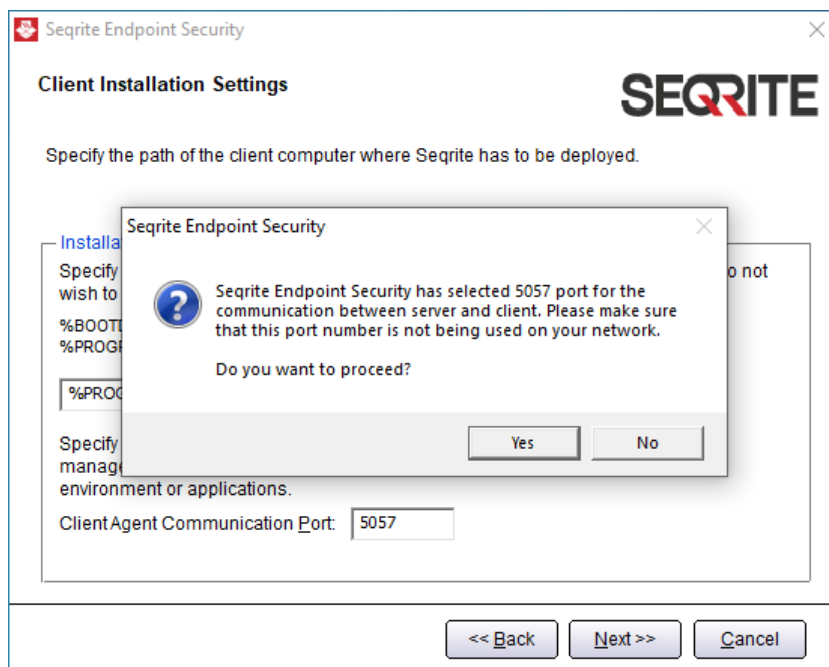

- Endpoint Security Administrator Password

กำหนด รหัสผ่าน Admin สำหรับเข้าใช้งาน Management Console

- Client Password กำหนดรหัสผ่าน ที่เครื่อง Client ป้องกัน Uses แก้ไขค่า Config ต่างๆ

Seqrite Endpoint Security

Authentication
Prevent unauthorized access.

Specify Administrator password to access Seqrite Endpoint Security Webpage.

Endpoint Security Administrator Password

Password: *****

Confirm Password: *****

To protect anti-virus options from being changed without your permission, you can choose to protect it by enabling password protection for the same.

Client Password

Password: *****

Confirm Password: *****

<< Back Next >> Cancel

- กำหนด User และ Password MySQL > Next

Seqrite Endpoint Security

MySQL Authentication
Provide MySQL user details.

Please specify username and password for MySQL user creation.

MySQL User Details

Username: admin


Port: 62228

Password: *****


Confirm Password: *****

<< Back Next >> Cancel


- กด Next

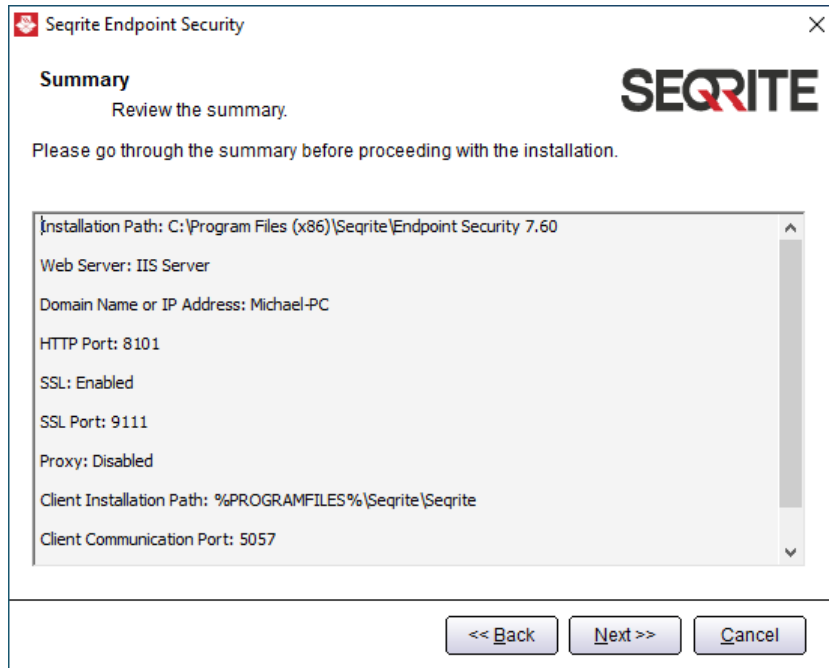

- กด OK

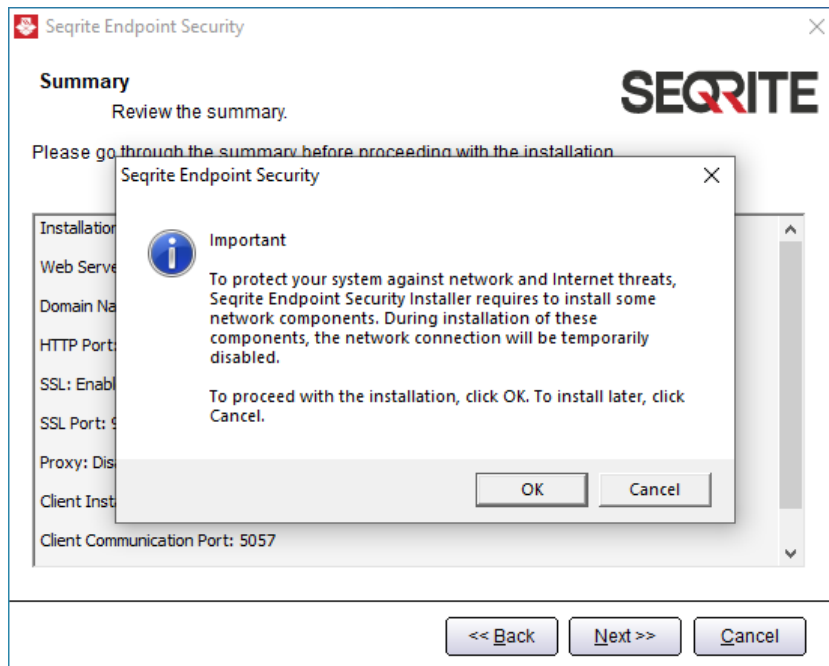

- ระบบจะทำการติดตั้งโปรแกรม > กด Next

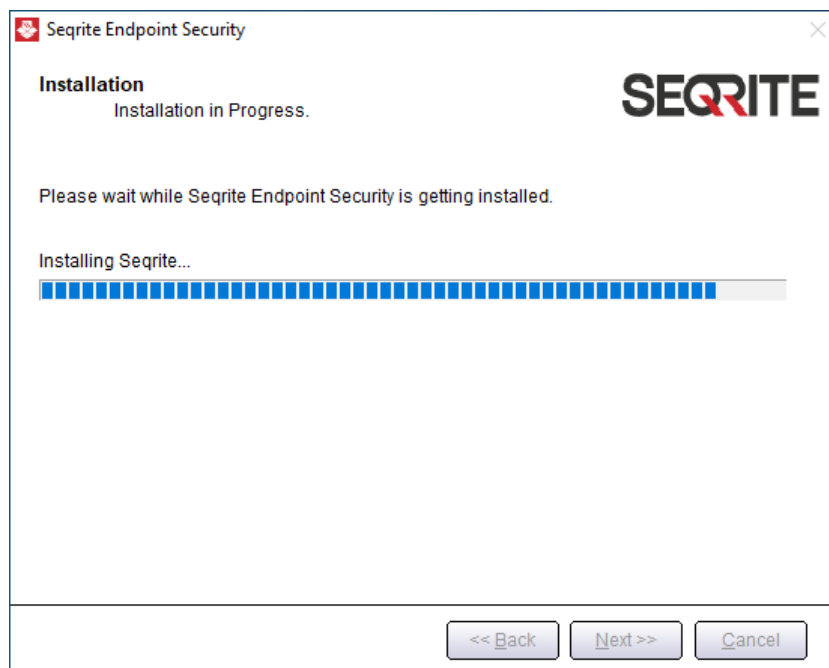


- กด Next



- คลิกช่อง Automatic delete report ออก (แนะนำ) > กด Next




- Registration ใส่ Product Key > Next

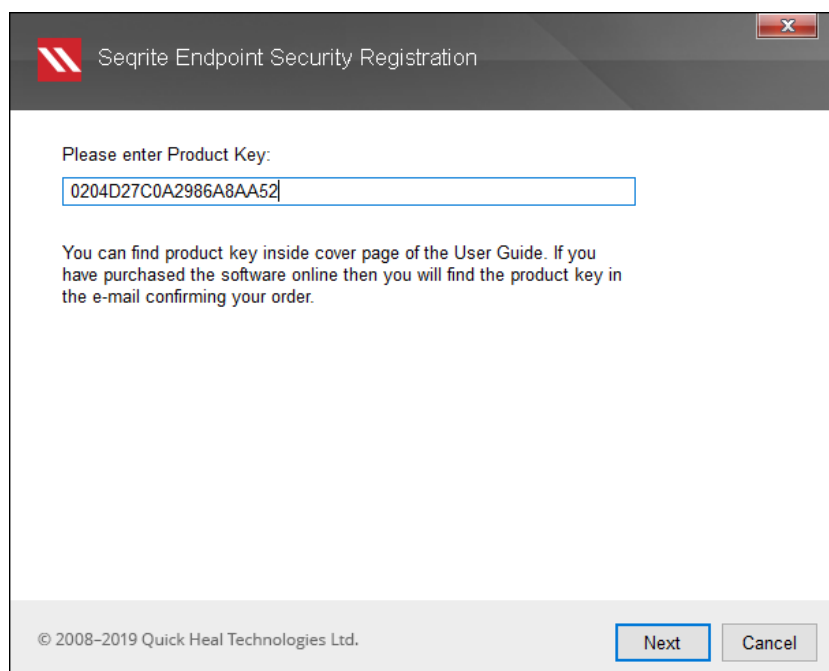


- Purchase from ระบุชื่อ บริษัท

- Name ชื่อผู้สั่งซื้อ หรือ ไอที

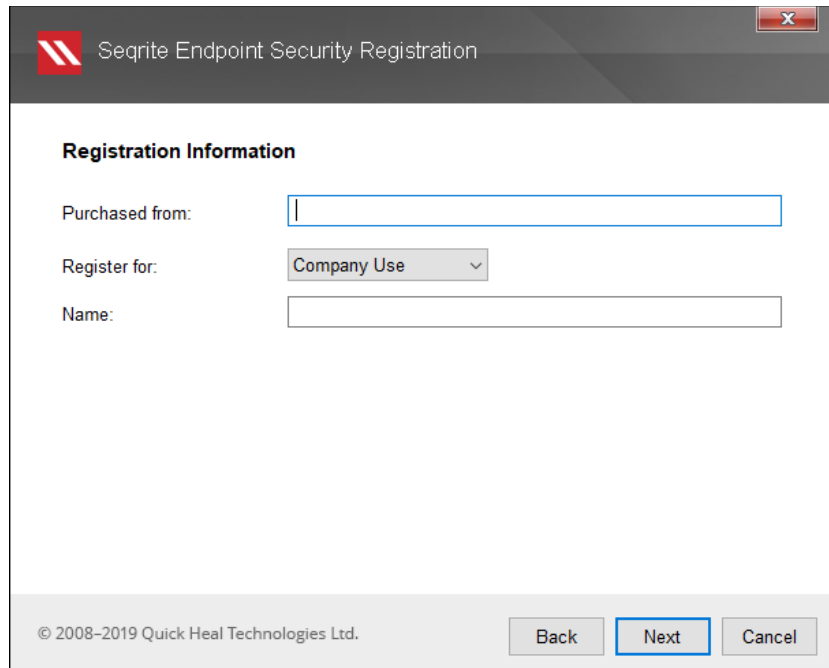


The screenshot shows the 'Seqrite Endpoint Security Registration' window. The title bar includes the Seqrite logo and the text 'Seqrite Endpoint Security Registration'. The main content area is titled 'Registration Information' and contains three input fields: 'Purchased from:' (empty), 'Register for:' (a dropdown menu with 'Company Use' selected), and 'Name:' (empty). At the bottom, there is a copyright notice '© 2008-2019 Quick Heal Technologies Ltd.' and three buttons: 'Back', 'Next' (highlighted in blue), and 'Cancel'.

- กำหนดรายละเอียดต่างๆ > Next

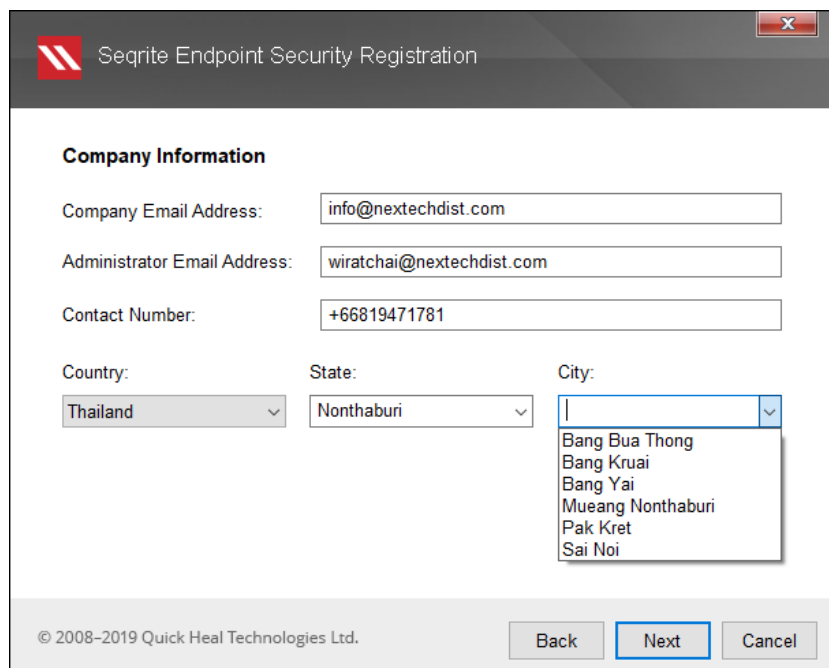


The screenshot shows the 'Seqrite Endpoint Security Registration' window at the 'Company Information' step. The title bar is the same as the previous screenshot. The main content area is titled 'Company Information' and contains several input fields and dropdown menus: 'Company Email Address:' (filled with 'info@nextechdist.com'), 'Administrator Email Address:' (filled with 'wiratchai@nextechdist.com'), 'Contact Number:' (filled with '+66819471781'), 'Country:' (dropdown menu with 'Thailand' selected), 'State:' (dropdown menu with 'Nonthaburi' selected), and 'City:' (dropdown menu with a list of cities: Bang Bua Thong, Bang Kruai, Bang Yai, Mueang Nonthaburi, Pak Kret, Sai Noi). At the bottom, there is a copyright notice '© 2008-2019 Quick Heal Technologies Ltd.' and three buttons: 'Back', 'Next' (highlighted in blue), and 'Cancel'.


- แสดงข้อมูลการ Registration > Next

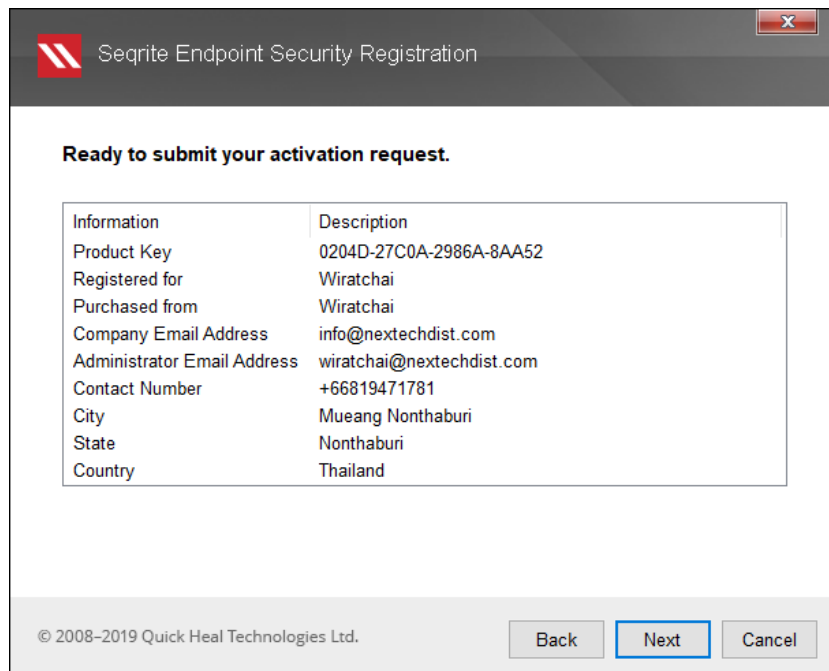


- Activate License เรียบร้อย > finish

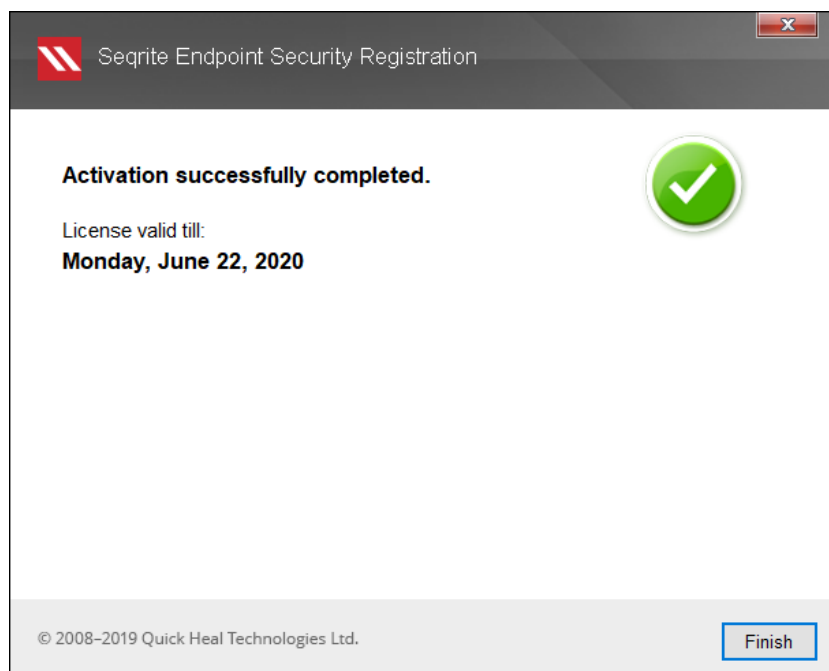


- Seqrite Update Manager (ทำการอัปเดต) > ใส่ Password Admin

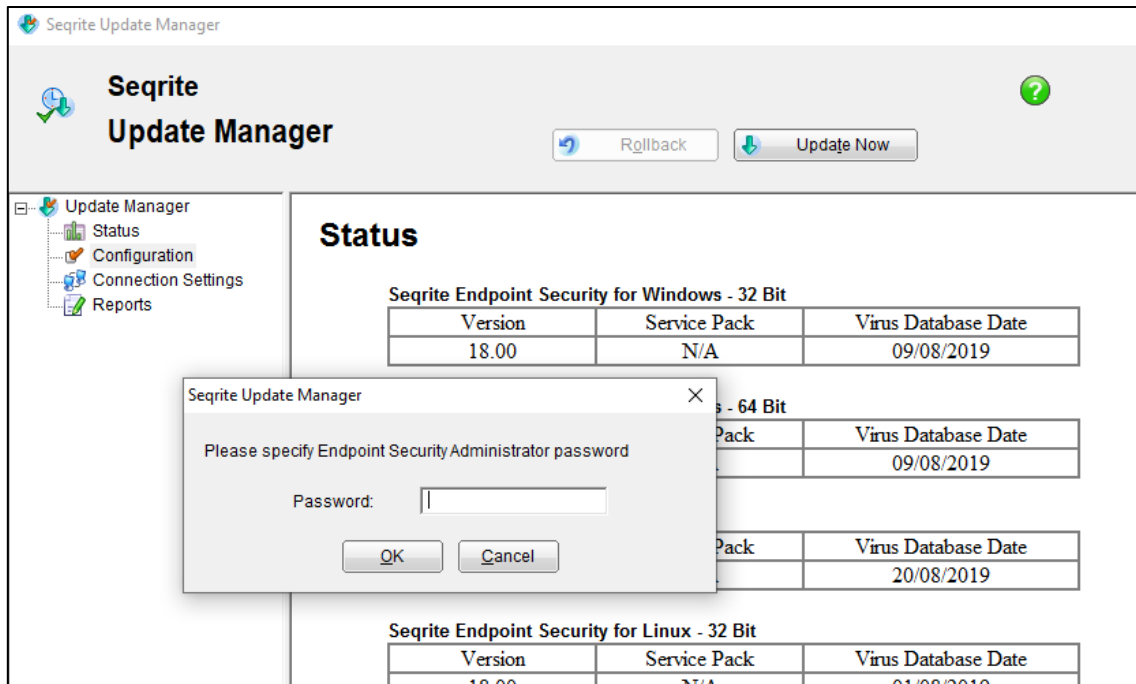

- Select the Update want to download เลือกระบบปฏิบัติการที่ต้องการใช้
สำหรับเครื่อง Client > Apply > Update Now

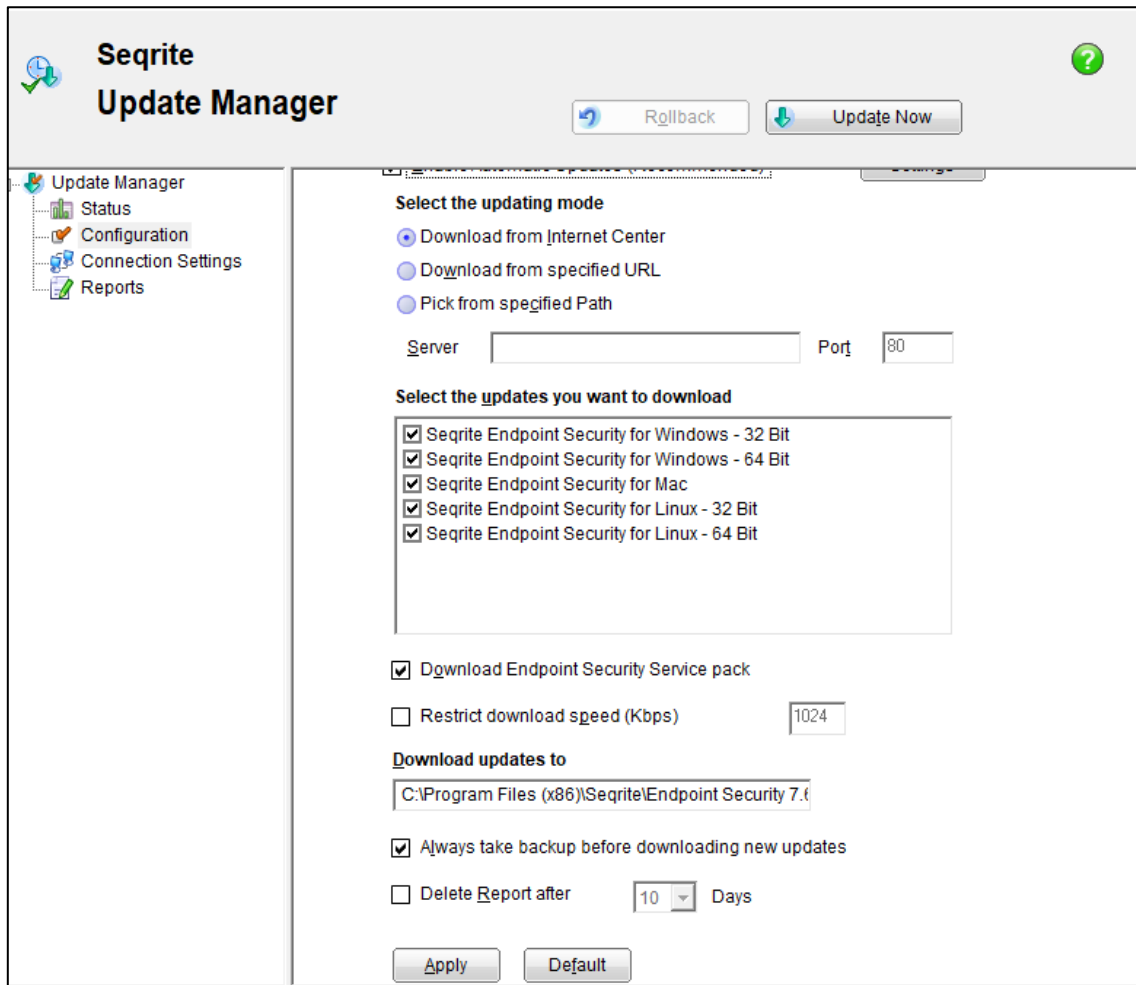

- ปล่อยอัปเดตไว้จนเสร็จ > Finish

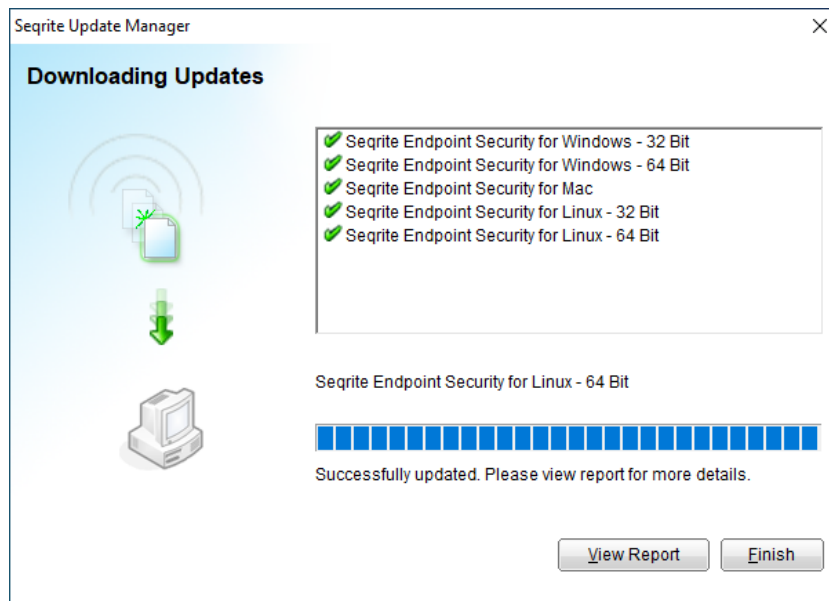

- เสร็จสิ้นสำหรับการติดตั้ง > Finish

