



Seqrite Endpoint Security 7.6

Administrator's Guide

วิธีการเพิ่ม USB Device เข้าระบบ

SEPS SME
SEPS Business
SEPS Total
SEPS Enterprise Suit

วิธีการเพิ่ม USB Device เข้าสู่ระบบ

วิธีนี้เป็นการ เพิ่ม USB ให้ระบบรู้จักตัว USB Devices เพื่อให้สามารถบริหารจัดการต่อไป

ในที่นี้แนะนำ 2 วิธี

วิธีที่ 1 เพิ่ม USB โดยกำหนดให้ USB สามารถใช้งานได้เฉพาะในองค์กรเท่านั้น ไม่สามารถนำไปใช้กับเครื่องอื่น ที่ไม่ได้ทำการติดตั้ง Seqrite EPS (ต้อง Format และ Encrypt)

1. เข้าสู่หน้า Console Seqrite Endpoint Security Management

ไปที่เมนูด้านบนสุด Admin Settings > แถบ Server > Manage Devices > USB Devices

The screenshot shows the Seqrite Endpoint Security 7.6 Admin Console. The top navigation bar includes 'Admin Settings', 'Support', 'Help', and 'Logout'. Below this, there are tabs for 'Home', 'Clients', 'Settings', and 'Reports'. The 'Admin Settings' section is expanded to show 'Server' and 'Clients'. Under 'Server', the 'Manage Devices' option is selected. A dropdown menu is open, showing 'USB Devices' as the selected option. The main content area displays a table with columns for 'Device Name', 'Device Type', 'Endpoint Name', and 'Serial Number'. The table is currently empty, with the text 'No Records available' displayed below it. The footer of the console features the 'GoDeep.AI' logo and the text 'AI Enabled Deep Predictive Malware Hunting Technology'.

- จะมีหน้าต่าง Add Device ให้ทำการดาวน์โหลด Device Control package กด [Click here](#)

Add Device

In order to authorize device, please [click here](#) to download Device Control package.
Unpack Device Control package (DEVCTRL.7Z) after download is finished. Then follow these steps to authorize device:

- 1.Run DCCONFIG.EXE
- 2.Attach device.
- 3.Authorize and click on Save To File. A file <file_name> will be created. (Note: you can authorize single device one by one)

Once a device is authorized, click on Browse button to select the file.

Device Control file path:


Note:
1.If you are unable to download the package, you may also use the Device Control Tool to add devices.This tool is available at the location given below on the EPS server. Path of Device Control Tool: <installation folder>\Admin\dcconfig.exe

devctrl (1).7z


- รันไฟล์ dcconfig.exe

Name	Date modified	Type	Size
acasmisc.dll	25/8/2019 22:48	Application exten...	238 KB
acevtlog.dll	25/8/2019 22:47	Application exten...	192 KB
acres.dll	25/8/2019 22:54	Application exten...	95 KB
ctrllib.dll	25/8/2019 22:42	Application exten...	399 KB
dcconfig	25/8/2019 22:54	Application	100 KB
dcio.dll	25/8/2019 22:52	Application exten...	41 KB
dcres.dll	25/8/2019 22:50	Application exten...	28 KB
epspk.dat	29/5/2020 9:06	DAT File	1 KB
GDIPLUS.DLL	25/8/2019 22:50	Application exten...	1,677 KB
mfc90u.dll	25/8/2019 21:33	Application exten...	1,136 KB
Microsoft.VC90.CRT.manifest	25/8/2019 21:33	MANIFEST File	1 KB
Microsoft.VC90.MFC.manifest	25/8/2019 21:33	MANIFEST File	1 KB
msvcp90.dll	25/8/2019 21:33	Application exten...	556 KB
msvcr90.dll	25/8/2019 21:33	Application exten...	641 KB
registry.dll	25/8/2019 22:53	Application exten...	96 KB
ver.cnf	25/8/2019 21:32	CNF File	2 KB
verinfo.dll	25/8/2019 22:45	Application exten...	128 KB

- ทำการเสียบ USB > Retrieve > ตั้งชื่อ USB > ตี๊กช่องสี่เหลี่ยม > Add

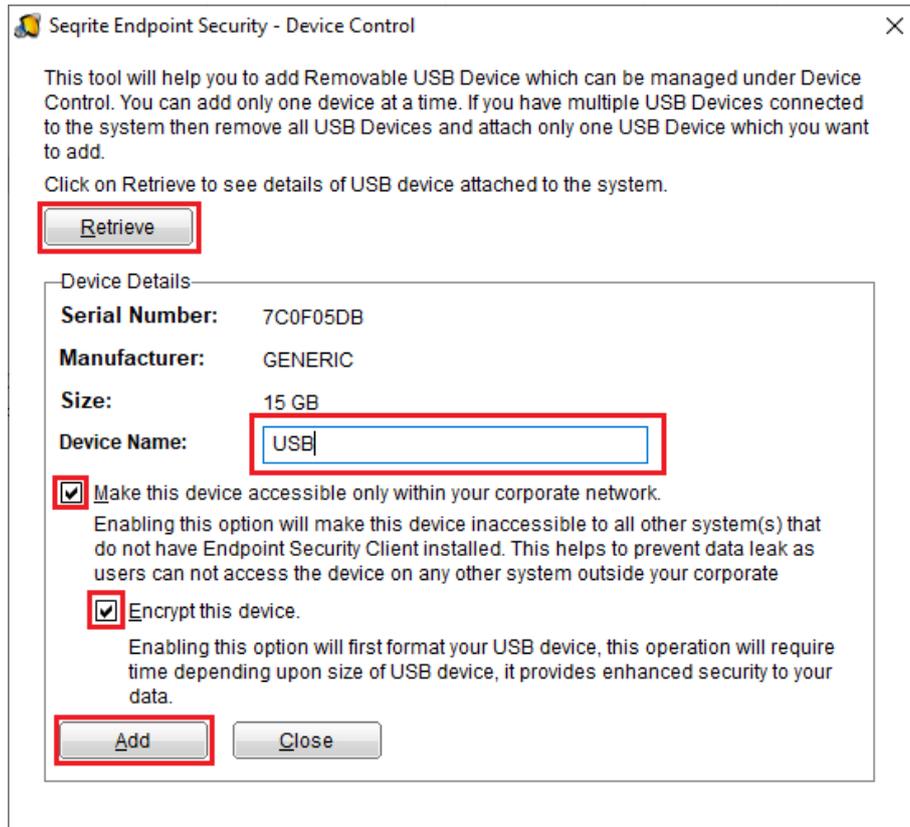

- ทำการ Format USB กด Start > เพิ่ม USB เรียบร้อย

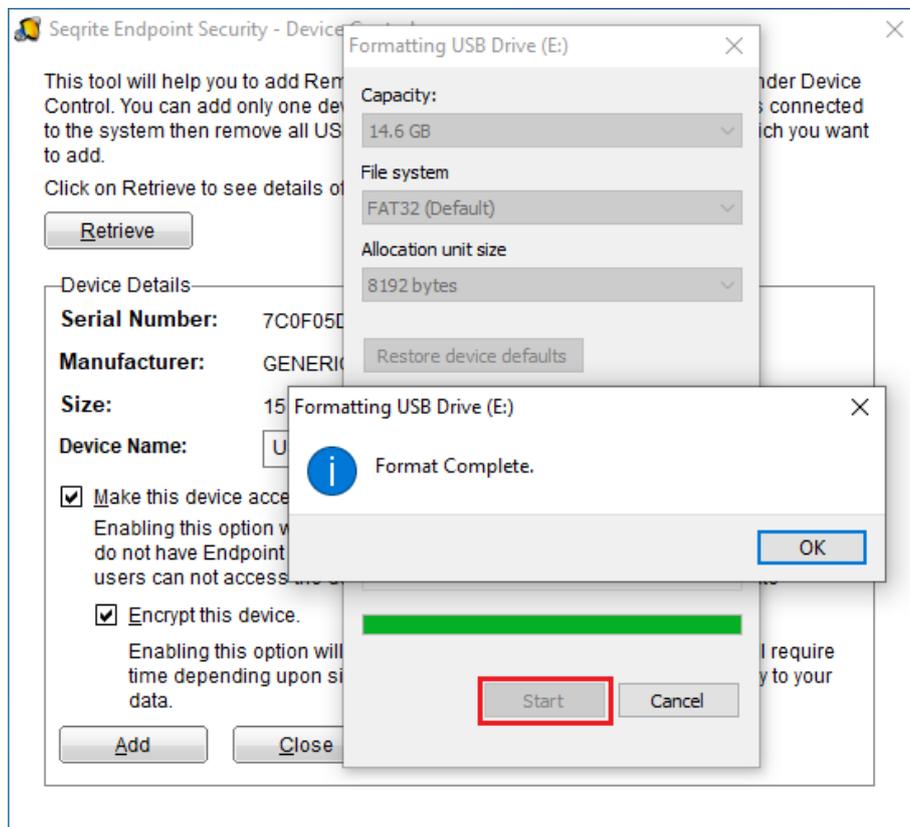

วิธีที่ 2 เพิ่ม USB โดยใช้ Serial Number วิธีนี้ไม่ได้มีการ Encrypt USB สามารถนำไปใช้กับเครื่องอื่นได้

1. เข้าสู่หน้า Console Seqrite Endpoint Security Management

ไปที่เมนูด้านบนสุด Admin Settings > แถบ Server > Manage Devices

> Add Devices > USB by serial Number

Seqrite Endpoint Security 7.6 Enterprise Suite

Welcome Administrator | Admin Settings | Support | Help | Logout

Home Clients Settings Reports

Admin Settings

Server Clients

Change Password
Change Email Address
Notification
SMTP Settings
Manage Devices
Data Loss Prevention
Redirection
Manage Users
Internet Settings
Patch Management
General

Manage Devices

Following list contains devices which can be added to the device exceptions in Device Control settings.

Add Devices
Network Devices
USB Devices
USB by Model
USB by Serial Number
Other Devices

Device Name	Device Type	Endpoint Name	Serial Number
USB	USB Storage Device	-	7C0F05DB

GoDeep.AI AI Enabled Deep Predictive Malware Hunting Technology. KNOW

- ตั้งชื่อ USB > ใส่ Serial Number > OK

Seqrite Endpoint Security 7.6 Enterprise Suite

Welcome Administrator | Admin Settings | Support | Help | Logout

Home Clients Settings Reports

Admin Settings

Server Clients

Change Password
Change Email Address
Notification
SMTP Settings
Manage Devices
Data Loss Prevention
Redirection
Manage Users
Internet Settings
Patch Management

Add Device by Serial Number

Device Name
USB02

Add Serial Number
86A69B1D

Device added successfully.

OK

OK Cancel

เสร็จสิ้นสำหรับการเพิ่ม USB Devices สามารถนำไปตั้งค่า จัดการการใช้งานใน Policy ต่อไป

Seqrite Endpoint Security 7.6 Enterprise Suite

Welcome Administrator | Admin Settings | Support | Help | Logout

Home Clients Settings Reports

Admin Settings

Server Clients

Change Password
Change Email Address
Notification
SMTP Settings
Manage Devices
Data Loss Prevention
Redirection
Manage Users
Internet Settings
Patch Management
General

Manage Devices Add Devices

Following list contains devices which can be added to the device exceptions in Device Control settings.

Enter text here

Device Name	Device Type	Endpoint Name	Serial Number	Model Name
USB	USB Storage Device	-	7C0F05DB	-
USB02	USB Storage Device	-	86A69B1D	-

GoDeep.AI AI Enabled Deep Predictive Malware Hunting Technology. KNOW